




Enovation 40mm Commercial Sliding Door

Contemporary design, robust durability and practical functionality – the Enovation 40mm Commercial Sliding Door has it all. Built tough to withstand high-usage and fierce weather conditions, this system is designed to deliver lasting performance. More than just practical, the Enovation 40mm Commercial Sliding Door also offers incredible style with architecturally-appealing low-profile sills and soft-curved mullions and transoms.



FEATURES & BENEFITS

- Highly-durable – able to withstand aggressive weather conditions
- Heavy-duty, dual-carriage Ezi-Slide bogey rollers
- Dual precision bearings on each roller for enhanced durability and easy operation
- Low profile high-performance sills
- Clean lines with soft-curved mullions and transoms
- Double-glazing, fused with Ezi-Seal technology, delivers supreme insulation acoustics and weather durability
- Versatile screen options
- NATA tested and accredited

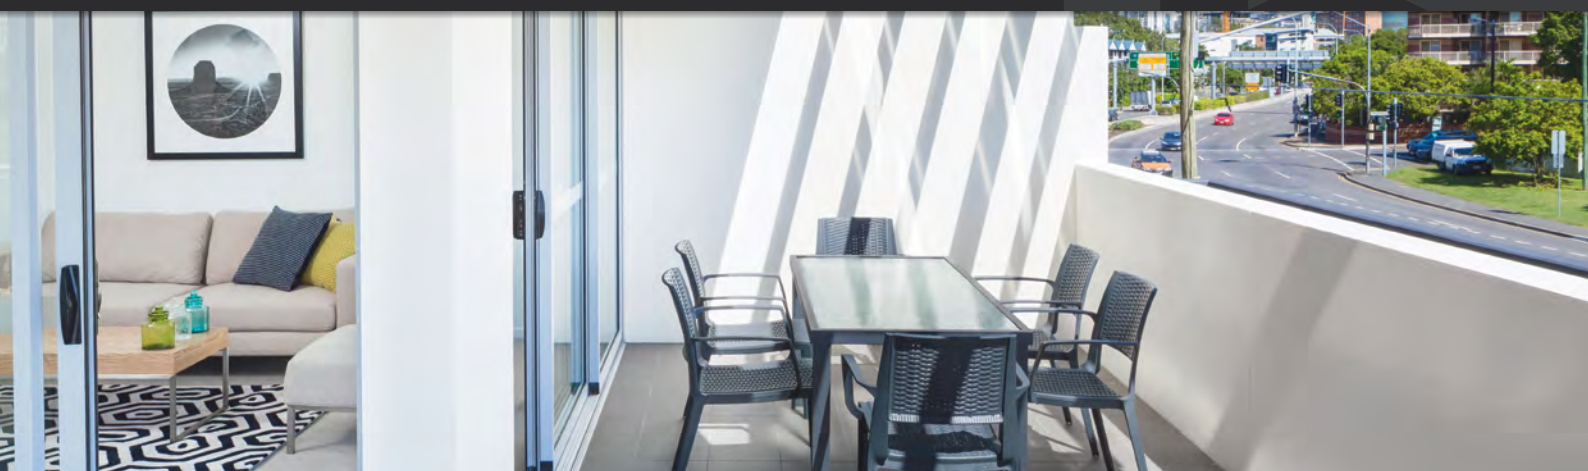

PRODUCT OPTIONS

- Versatile configuration
- Heavy-duty options for high-wind-load areas
- Single-direction or bi-parting openings
- Single and double glazing
- Multiple track options
- 90 degree post-less corner
- Integrate AS1428.1 compliant flush sill options

WINDOW ENERGY RATING - TOTAL WINDOW AFRC

Window ID	Glazing	Uw	SHGC	Tvw	Air Inf.
Single Glazing					
EZI-012-01	6.38mm Clear Laminate	6.0	0.64	0.70	0.23
EZI-012-02	6.38mm Grey Laminate	6.0	0.50	0.33	0.23
EZI-012-03	6.38mm Comfort Plus Grey	4.4	0.41	0.31	0.23
Double Glazing					
EZI-013-01	6mm Clear / 12mm Air / 6mm Clear	3.8	0.58	0.63	0.23
EZI-013-02	6.38mm ComfortPlus Grey / 12mm Air / 6mm Clear	3.2	0.35	0.28	0.23
EZI-013-03	6.38mm ComfortPlus Clear / 12mm Argon / 6mm Clear	3.0	0.49	0.58	0.23

SPECIFICATIONS

FRAME SIZE

50mm, 101.6mm, 150mm, 200mm

MAXIMUM OPENING SIZE

3100mm high x 12000mm wide

MAXIMUM PANEL SIZE

3000mm high x 1800mm wide

MAXIMUM PANEL WEIGHT

180kgs

MAXIMUM NO. OF PANELS

Unlimited

GLAZING RANGE

5mm - 10.38mm (12.5mm pocket)
10.38mm - 15mm (18.5mm pocket)
15mm - 32mm (35.2mm pocket)

COMMON CONFIGURATIONS (VIEWED FROM OUTSIDE)

Our modular design enables many different configurations. A selection of possible configuration options is depicted here.

