




Enovation Apartment Sliding Window

Strong, reliable, practical and simple. The Enovation Apartment Sliding Window is designed for efficient installation and long-lasting performance. This highly-durable system has been tested to comply with Australian Standards and is capable of withstanding even treacherous weather conditions. Complete with soft-curved mullions and quality ball bearing rollers and seals, the Enovation Apartment Sliding Window is a tremendous all-round, high-performance system.

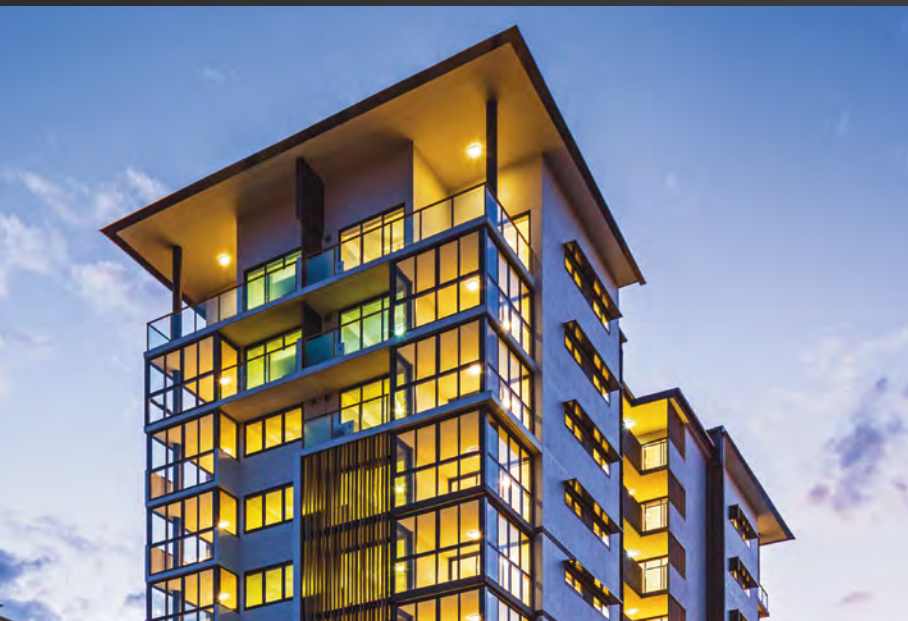

FEATURES & BENEFITS

- Effortless 'slide-and-glide' operation
- High-performance seals for a climate-controlled acoustic atmosphere
- Durable stile depth of 26mm – capable of coping with even extreme weather conditions
- Screening provisions and keyed sash locks for optimum security
- High performance glazing, fused with Ezi-Seal technology, delivers supreme insulation, acoustics and weather durability
- NATA tested and accredited



PRODUCT OPTIONS

- Standard two, three and four panel configuration options
- Multi-stacking options – up to eight panels
- Versatile combination of fixed and sliding panels – including highlights and lowlights
- 90 degree corner post
- Heavy-duty components for high-wind-load areas
- Adaptable configuration – suitable for simple to complex projects

WINDOW ENERGY RATING - TOTAL WINDOW AFRC

Window ID	Glazing	Uw	SHGC	Tvw	Air Inf.
Single Glazing					
EZI-016-01	6.38mm Clear Laminate	6.2	0.62	0.67	0.41
EZI-016-02	6.38mm Grey Laminate	6.2	0.49	0.30	0.41
EZI-016-03	6.38mm Comfort Plus Grey	4.7	0.40	0.30	0.41
Double Glazing					
EZI-017-05	4mm Clear / 7mm Air / 4mm Clear	4.2	0.60	0.62	0.41
EZI-017-06	4mm Energy Tech / 7mm Air / 4mm Clear	3.7	0.51	0.57	0.41
EZI-017-07	4mm LightBridge Clear SO / 7mm Air / 4mm Clear	3.6	0.45	0.61	0.41

SPECIFICATIONS

FRAME SIZE

65mm, 101.6mm, 150mm

MAXIMUM OPENING SIZE

2800mm high x 11600mm wide

MAXIMUM PANEL SIZE

2750mm high x 1450mm wide

MAXIMUM PANEL WEIGHT

180kgs

MAXIMUM NO. OF PANELS

Up to 4 left + 4 right (8 in total)

GLAZING RANGE

5mm - 10.38mm (12.5mm pocket)
10.38mm - 15mm (18.5mm pocket)

COMMON CONFIGURATIONS (VIEWED FROM OUTSIDE)

Our modular design enables many different configurations. A selection of possible configuration options is depicted here.

